


Inhalt Normalprofile 1:50

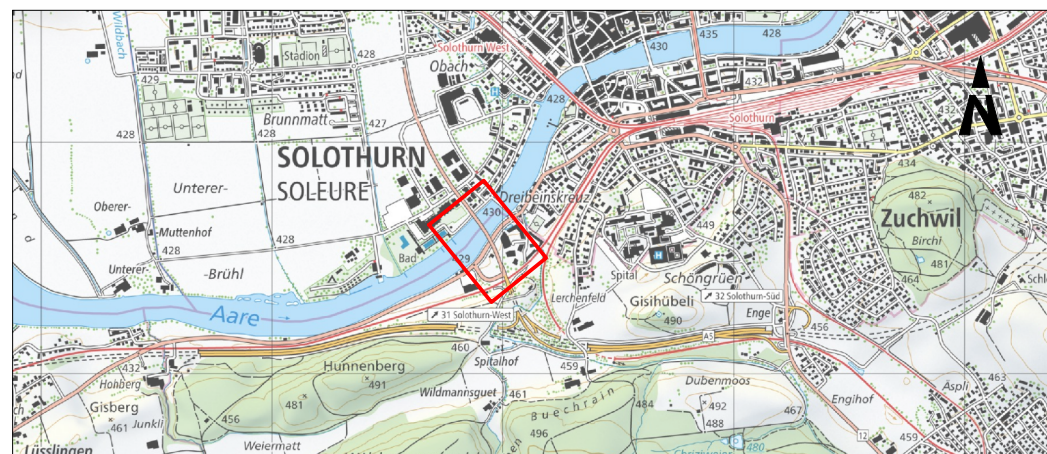

Elysiide 210 Postfach 10 | D-4912 Aarnungen | T +49 3543 706 18 90
 Koellnische 210 CH-6008 Pfaffeln | T +41 3543 706 18 90
 Info: Germany@elc.ch 4870-0000 T +41 3543 400 23 32

[illegible]

Technical cross-section drawing of a bridge deck. The drawing shows the following components and dimensions:

- Dimensions:**
 - Top horizontal dimensions: 1.00, 0.50, 3.25, 2.75, 3.00, 0.50.
 - Bottom horizontal dimensions: 1.00, 0.50, 3.25, 2.75, 3.00, 0.50.
 - Vertical dimension on the right: 2.50.
- Labels and Components:**
 - AS / Biberist:** Located at the top left, indicated by a downward-pointing triangle.
 - Obach:** Located at the top right, indicated by an upward-pointing triangle.
 - Brückenschwelle:** A horizontal line across the middle of the deck.
 - Fahrbahnschale:** A horizontal line below the bridge threshold.
 - LW:** Two large rectangular areas on the left and right sides of the deck.
 - PW:** A smaller rectangular area in the center of the deck.
 - 2.50%:** A slope indicator on the left side of the deck.
 - var:** A label near the bottom left corner.
 - Imprägnierung Verfahren 1.2 erneuern Graffitschutz erneuern:** A label on the left side of the deck.
 - Gussasphaltbelagkeil 3-schichtig, abgestreut mit Splitt:** A label on the right side of the deck.
 - Aufheben und abdichten der Einlaufschächte:** A label at the bottom right corner.
 - Ersetzen Roste mit D400 Brückeneinlaufabdeckungen:** A label at the bottom left corner.

The diagram illustrates a cross-section of a bridge deck with three traffic lanes labeled LW (left), PW (middle), and LW (right). The total width is 9.00m. Dimensions are as follows:

- Lane Widths:** 3.25m for each side lane (LW) and 2.75m for the middle lane (PW).
- Shoulder Widths:** 0.50m on the left and right.
- Overhead Clearance:** 2.75m for the side lanes and 3.00m for the middle lane.
- Bridge Deck Thickness:** 0.50m.
- Construction Details:**
 - Imprägnierung Verfahren 1.2 erneuern Graffitschutz erneuern**: Impregnation method 1.2 renew graffiti protection renew.
 - Gussasphaltbelagkeil 3-schichtig, abgestreut mit Splitt**: Cast asphalt concrete wedge 3-layer, broadcast with grit.
 - Aufheben und abdichten der Einlaufschächte**: Lift and seal the inlet shafts.
 - Ersetzen Roste mit D400 Brückeneinlaufabdeckung**: Replace grates with D400 bridge inlet cover.